

MANUAL CALL POINT PUCAY



Resettable Manual Call Point (with short-circuit isolator) for analogue addressable detection systems.

It has a LED that lights up when the call point is manually triggered (alarm), as well as showing a yellow tab on the lower side of the activation face. A single flash shows communication with the control panel.

It is easy to reset through activation of the yellow button sited in the front face by means of a screwdriver.



Features:

- Easily resettable call point by pushing yellow button on the front side.
- Transparent protector cover to avoid accidental false alarms.
- Self-identified element in the fire detection analogue system.
- Communication with the control panel is indicated by a single flash of the LED.
- Immediate visual recognition of alarm status by the permanent activation of the LED, and the trigger of the yellow tab on the lower side of the activation face.
- According to EN 54-11 Standard, and CE labelled according to the *European Directive of Construction Products (89/106/CEE)*.

TECHNICAL FEATURES

Power Supply	24 - 35V with polarity
Standby Current	1 mA
Alarm Current	5 mA
Activation Signal	Red Light
Remote Indicator Output	No
Humidity	20 - 95% HR
Temperature	-10°C +40°C
Standard	EN 54-11
IP Protection	IP 50

Wiring Diagram

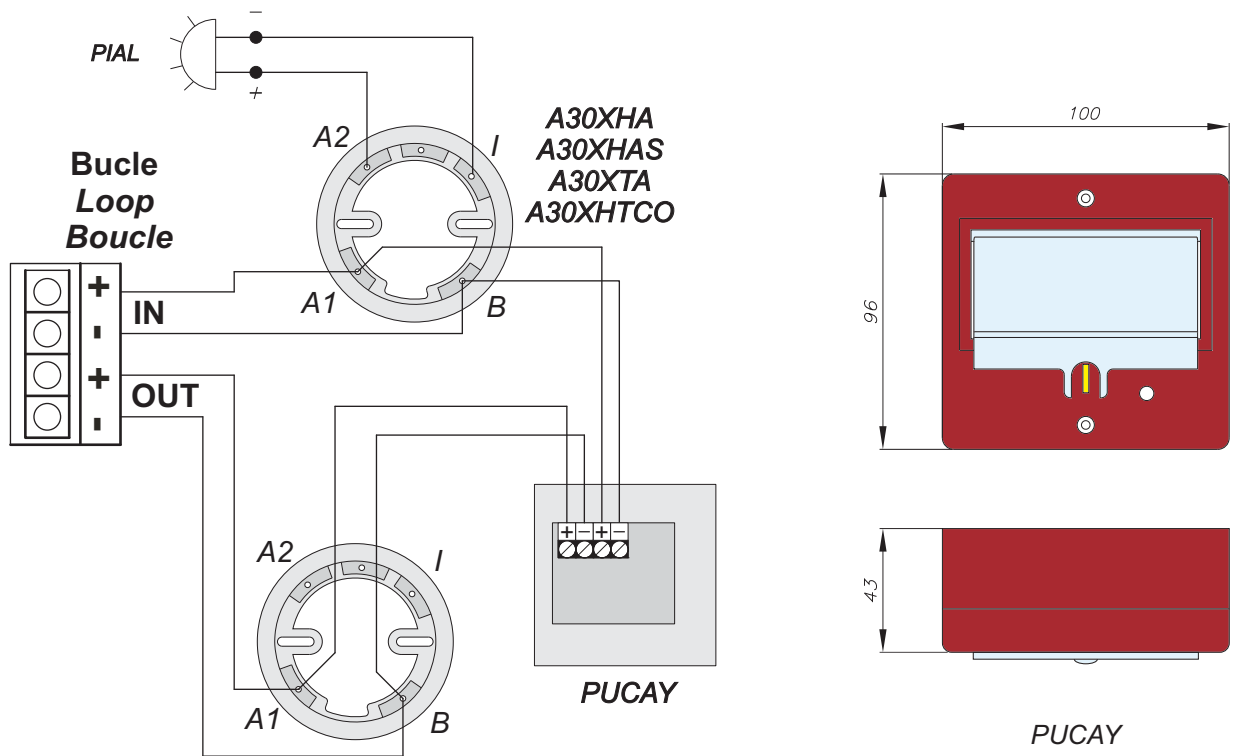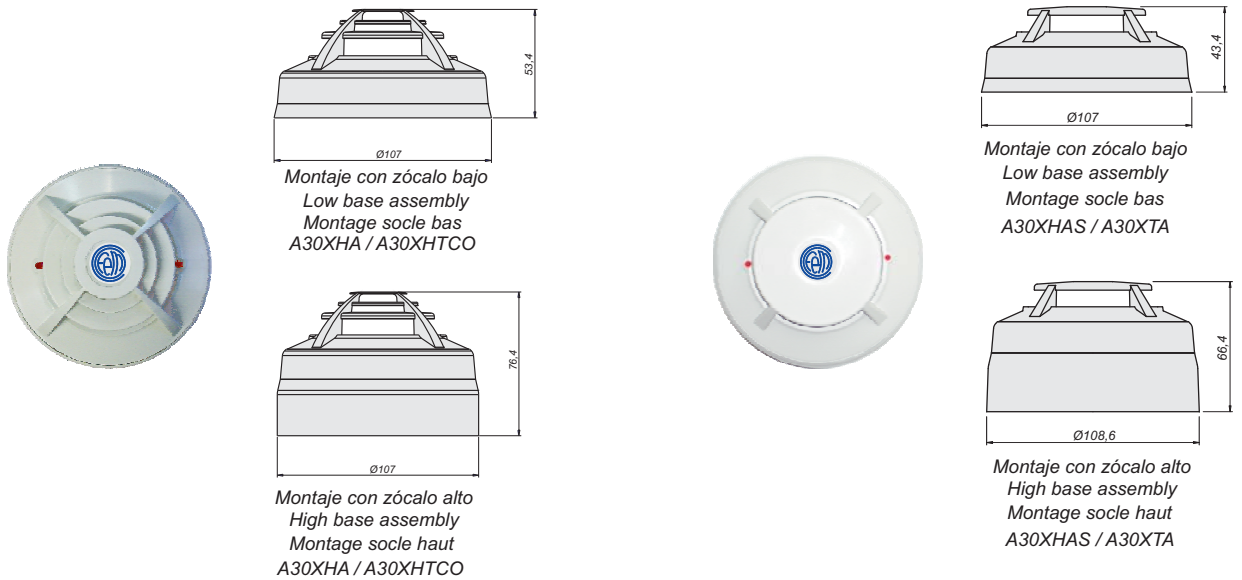

A30XHA / A30XHAS / A30XTA / A30XHTCO