


FM-106 HS

HIGH SECURITY SWITCH

PRINCIPLE OF OPERATION AND INSTALLATION INSTRUCTIONS

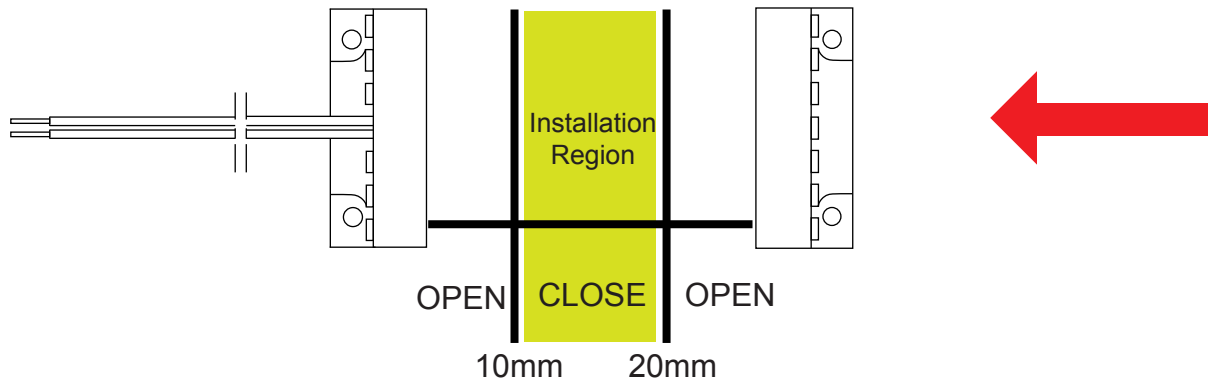

PRINCIPLE OF OPERATION

When the magnet comes close to the switch, the switch will close.

High security is made possible by ballancing the external and internal magnetic fields.

INSTALLATION INSTRUCTIONS

1. Before installation, be sure the switch and the magnet must be kept in the proper direction.

See above drawing.

2. Bring magnet slowly to the switch until switch **JUST** closes.

3. Secure switch and magnet.

Installation is complete.

NOTE: Bringing an external magnet to defeat the security switch will set off alarm.



The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com