



CODE: **AWO250PU** v.1.8/V  
 NAME: **17/50/DSPR/PUSTA**

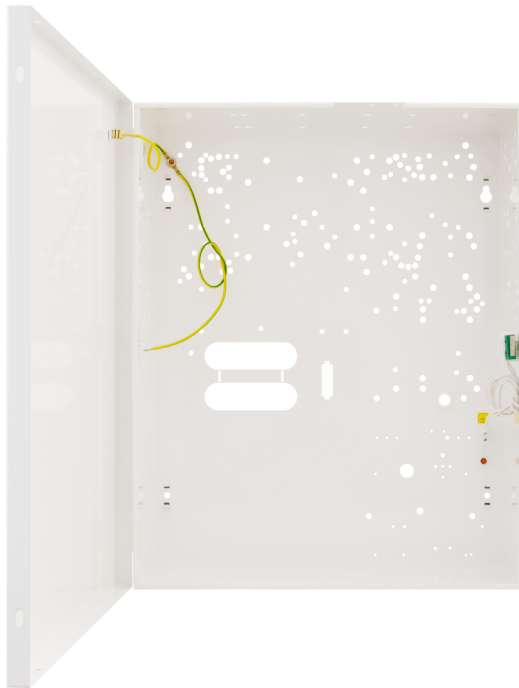

EN

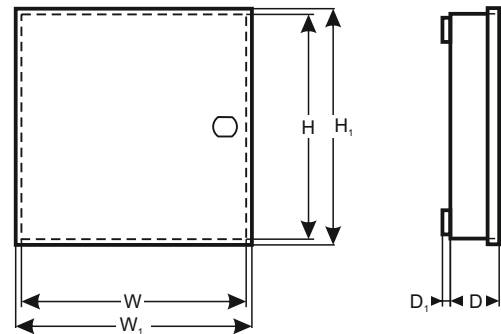

### DESTINATION

**DSC:** PC1616, 1832, 1864, 4020 + 7x 5108 (4108, 5208, 5100, 4116)

PC1616, 1832, 1864, 4020 + 2x (5400, 5580, 4216) + 5x (4108, 5108, 5208, 5100, 4116)

PC1616, 1832, 1864, 4020+ (5204, 5200) + 6x 5108 (4108, 5208, 5100, 4116)

**MODULES:** 3x (5400, 5204, 5200, 5580, 4216) + 5x (5108, 4108, 5100, 4116, 5208)  
 4204 + 7x (5108, 4108, 5100, 4116, 5208)

**PARADOX:** E55, E65, 728ULT, EVO48, EVO192, SP4000, SP5500, SP6000, SP7000) + 4x ZX8 (APR3-ADM2, APR3-HUB2, PGM4)

**RISCO:** PRO24, 116, 128, 140+ RP296EPS (RP128 EPS) + 3x EZ16 (E04, EZ8)

**SATEL:** CA4VI, CA5, CA6

VERSA5,10 15, CA10 + 4 x CA10E (CA64E, SM, MST1)

INTEGRA 24, 32 + 4x CA64E (SM)

INTEGRA64, 128 + 3x CA64E (SM)

**MODULES:** CA64 (PP, EPS, ADR, O-R, O-ROC, O-OC, OPS-OC, OPS-R, OPS-ROC, VGM-16, SR, PT SA)+ 4x CA64E (SM)

**PYRONIX:** MATRIX 424, 816, 832, 832+

**TEXECOM:** PREMIER 412, 816, 832

PREMIER 48, 88, 168, 640 + COM 300 (ISDN)

**TELMOR:** TCA-824+ 2x (TEX800) + TMT1

**ROGER:** PR402, CPR 32-SE

2x blacha KD (AWO432)

**EBS:** PX202A

**PULSAR:** MS1012, MSR1012, MSR1012

MS2012, MSR2012, MSR1012

MSRK3012

### TECHNICAL DATA

**External dimensions of the enclosure:** W=320, H=400, D+D1=120+8 [+/-2 mm]

**External dimensions of the front panel:** W1=325, H1=405 [+/-2 mm]

**Weight net/gross:** 2,70kg / 2,90kg [+/-0,1kg]

**Battery space:** 17Ah/12V Sealed Lead Acid (SLA)

**Transformer:** without transformer - can be mounted in the casing: TRP50, TRP80, TRZ50, TRZ80, TOR50, TOR80, TOR100, TOR150.

**Tamper protection:** 1 x microswitch: opening, 0,5A@50V/DC max. NC

**Material description:** sheet steel DC01, thickness: 0,7mm, protection anticorrosion, color: RAL 9003

**Destination:** indoor

**Closing:** screwed x 4

**Notes:** optional: lockable, distance from wall (mounting surface) - 8mm, easy door removal

**Declaration, warranty:** CE, 2 years from production date