

## DS-3E1524-EI V2 24 Port Gigabit Smart Switch




- 24 × gigabit RJ45 ports.
- Gigabit network access design.
- Network topology management, alarm push, network health monitor.
- Solid high-strength metal shell.
- Reliable fan-free design.


## ▪ Specification

Model		DS-3E1524-EI V2
<b>Network Parameters</b>	Port Type	RJ45 port,full duplex,MDIMDI-X adaptive
	Standard	IEEE 802.3,IEEE 802.3u,IEEE 802.3x,IEEE 802.3ab
	Ports	24 × Gigabit RJ45 ports
	Forwarding Mode	Store-and-forward switching
	Working Mode	Standard mode (default)
	MAC Address Table	8 K
	Switching Capacity	48 Gbps
	Packet Forwarding Rate	35.712 Mpps
	Internal Cache	2 Mbits
<b>Software Function</b>	Device Maintenance	Support remote upgrade, default parameter restoration, logs viewing, and basic network parameter configuration.
	Port Configuration	Support port rate configuration, flow control, and ports enabling.
	Link Aggregation	Support static link aggregation.
	LLDP	LLDP protocol supported for port configuration, global configuration and neighbour discovery
	DHCP	Supported
<b>General</b>	Shell	Metal material, IP40
	Net Weight	1.62 kg (3.57 lb)
	Gross Weight	2.545 kg (5.61 lb)
	Dimensions (W × H × D)	335.00 mm × 44.50 mm × 175.80 mm (13.19" × 1.75" × 6.92")
	Operating Temperature	0 °C to 55 °C (32 °F to 131 °F)
	Storage Temperature	-40 °C to 85 °C (40 °F to 185 °F)
	Operating Humidity	5% to 95% (no condensation)
	Relative Humidity	5% to 95% (no condensation)
	Power Supply	220 VAC, 50/60 Hz, Max. 0.7 A
	Max. Power Consumption	13 W
	Power Consumption in Idle	5 W
<b>Approval</b>	EMC	FCC (ANSI C63.4, 47 CFR PART 15B); CE-EMC/RCM (EN 55032: 2015+A11:2020, EN IEC 61000-3-2: 2019, EN 61000-3-3: 2013+A1:2019, EN 50130-4:2011+A1:2014, EN 55035:2017+A11:2020); IC (ICES-003: Issue 20)
	Safety	UL (UL 62368-1); CB/RCM (IEC 62368-1:2014); CE-LVD (EN 62368-1:2014+A11:2030)
	Chemistry	CE-RoHS (2011/65/EU); WEEE (2012/19/EU); Reach (Regulation (EC) No 1907/2006)

## ▪ Typical Application

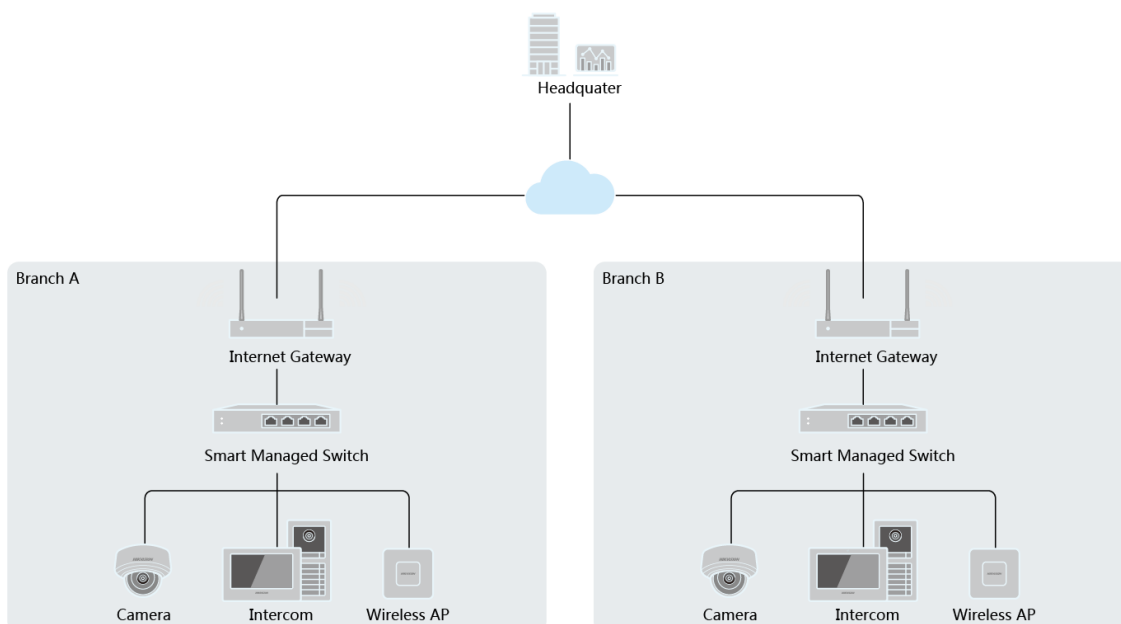


## ▪ Physical Interface

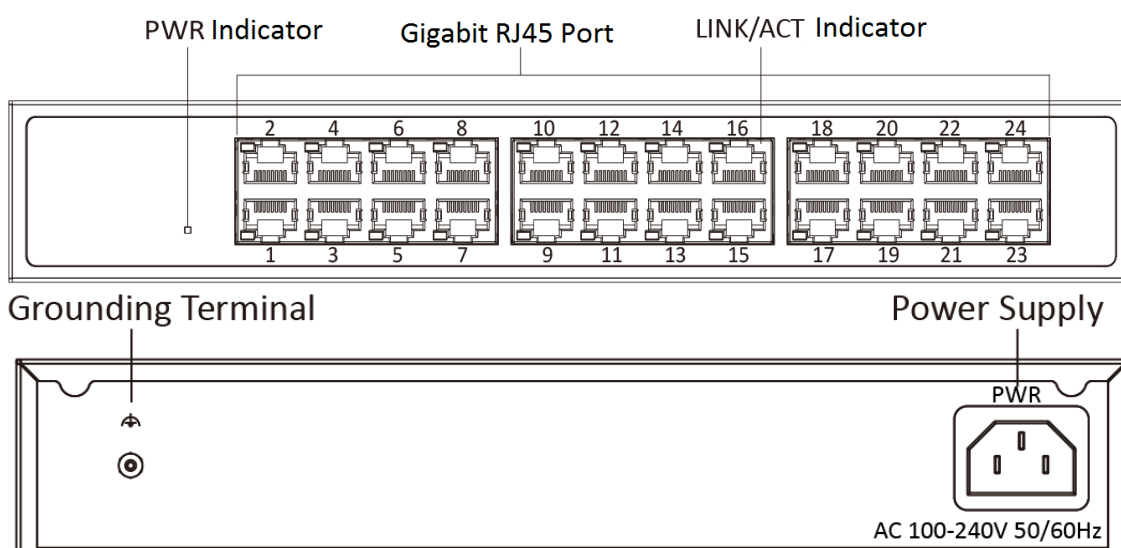

## ▪ Available Model

DS-3E1524-EI V2

## ▪ Dimension

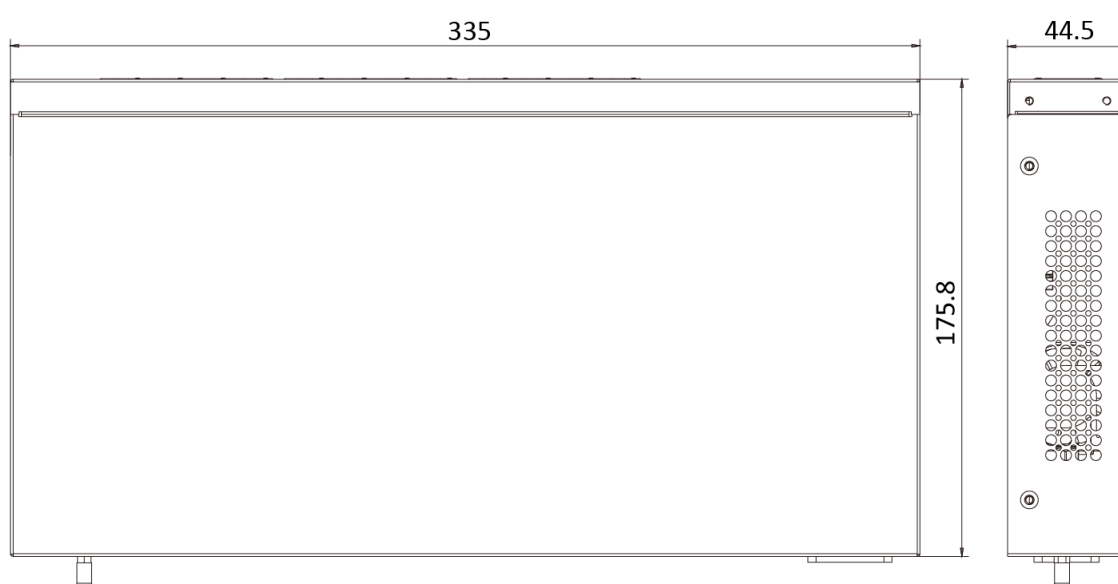

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

